

Features

Firefighter telephones provide direct communications with the Firefighter Telephone Control's master phone:


- When remote phones call the master, a call tone is provided to verify that the request is in process (exact performance may vary depending on master phone equipment)
- Two-wire telephone circuits are supervised and power-limited

Phone assemblies are available for:

- Surface or flush mounting, (NOTE: backbox is ordered separately)
- Or as separate phone sets for plugging into dedicated remote phone jack stations

Available options:

- Armored cable models to minimize vandalism (voice and ear caps are sealed with adhesive)

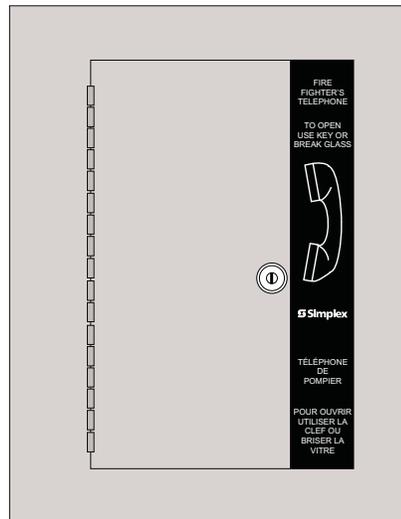

2084-9103-C Breakglass Door Assembly

Description

Remote Phone in Locked Cabinet. The red cabinet is silk-screened with Fire Fighter's Telephone on the door's breakglass. Phone is available with either an armored cable, or a retractable cable.

2084-9001 Remote Phone Jack Stations. Jacks are mounted on a single gang plate for use with pluggable phones. The front is marked "Fire Emergency Phone". An optional call LED indicator is available. No additional circuits are required to operate the call-in LED when the remote phone is connected to a Simplex fire fighter's phone system.

2084-9014 Red Pluggable Phone. The 2084-9014 emergency telephone is ruggedly constructed of Cycolac Type T, a thermal ABS material. A coiled line cord and jack is attached. Cord length is 5 ft. (1524 mm).




2084-9001 Remote Phone Jack Station



2084-9014 Pluggable Phone

* Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products Westminster.

Interior View of Typical Remote Phone Cabinet

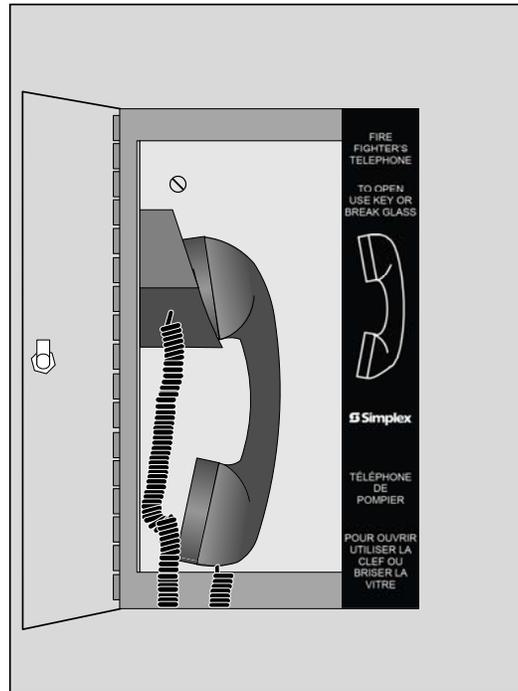

Firefighter Emergency Phones

Door with Breakglass (Select one from this category)

Model	Description	Dimensions
2084-9103-C	Red Surface Door	13 1/2" x 10 1/4" (343 mm x 260 mm)
2084-9104-C	Red Flush Door	15" x 12" (381 mm x 305 mm)
2084-9105-C	Stainless Steel Flush Door	

Phone Assembly (Select one from this category)

Model	Description
2084-9106-C	Red Phone Assembly - Armoured cable
2084-9107-C	Red Phone Assembly - Retractable cable

Back Boxes (Select one from this category)

Model	Description	Dimensions
2975-9053	Red Back Box (available for pre-installation)	13" H x 9 9/16" W x 3 1/2" D (330 mm x 243 mm x 89 mm)
2975-9313C	Red Back Box w/o knockouts	

Accessories

Model	Description
2084-9001	Remote Phone Jack, single gang mount, requires minimum of 2" (51 mm) box depth.
2084-9014	Pluggable Red Phone with 5' (1.5 m) long cable
2084-9108-C	Replacement Glass Insert for use with 2084-9103-C through -9105C

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited.



Tyco Fire Protection Products • Westminister, MA • 01441-0001 • USA
www.simplex-fire.com

S12084-0001-7 5/2014

© 2014 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.