

Addressable Notification Module

IDP-Control


The IDP-Control is an addressable notification module for use with Honeywell Farenhyt Series fire alarm control panels (FACPs). The IDP-Control gives you the flexibility to add notification circuits wherever they are needed on an Farenhyt FACP signaling line circuit (SLC) loop.

The IDP-Control provides supervised monitoring of wiring to load devices that require an external power supply to operate, such as bells, horns, and strobes. It is capable of Class B and Class A supervision.

Upon command from the FACP, the IDP-Control will disconnect the supervision and connect the external power supply across the load device. The disconnection of the supervision provides a positive indication to the panel that the control relay actually turned on. The external power supply is always relay isolated from the SLC loop, so that a trouble condition on the power supply will never interfere with the rest of the system.

Installation

The IDP-Control mounts directly into a 4" square electrical box. The box must have a minimum depth of 2-1/8". A surface mount electrical box (System Sensor® PN SMB500) is available from Honeywell.

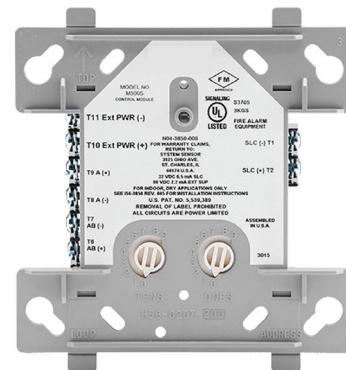

IDP-CONTROL

Compatibility

The IDP-Control is compatible with the following Farenhyt Series FACPs:


- IFP-2100 / IFP-2100ECS / RFP-2100
- IFP-2000 / IFP-2000ECS / RPS-2000
- IFP-1000 / IFP-1000ECS
- IFP-300 / IFP-300ECS
- IFP-100 / IFP-100ECS
- IFP-75
- IFP-50

FEATURES & BENEFITS


- Flexible solution for adding notification circuits where needed
- Support for Class B (style Y) or Class A (style Z) wiring
- Panel controlled status LED that flashes green in normal state and is solid red in alarm
- Polling LED visible through the cover plate
- Attractive ivory cover plate
- Rotary address switches for fast installation
- SEMS screws for easy wiring
- UL Listed
- CSFM Listed
- MEA Listed 386-02-E Vol. II

IDP-Control Technical Specifications

NOTIFICATION APPLIANCE CIRCUIT NFPA, CLASS B

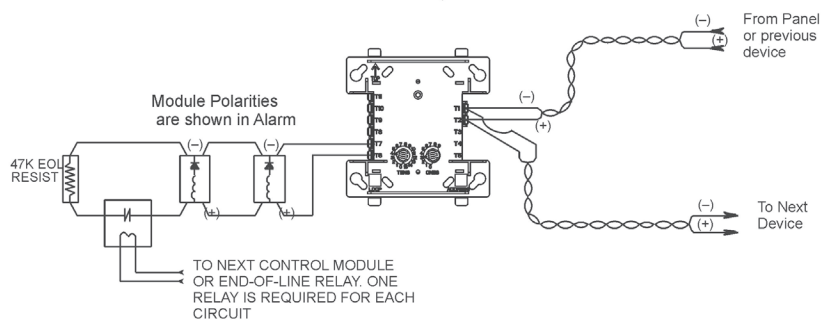

NOTIFICATION APPLIANCE CIRCUIT NFPA, CLASS A

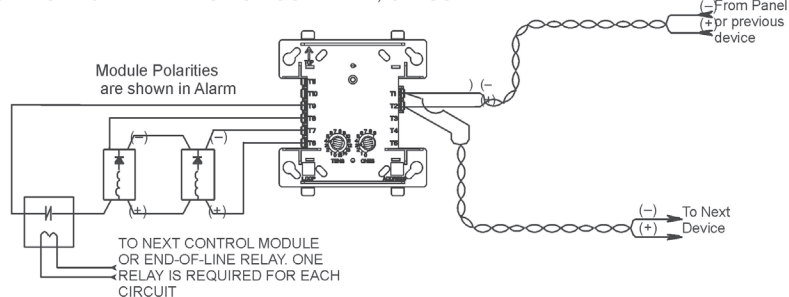

For a complete listing of all compliance approvals and certifications, please visit www.farenhyt.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Honeywell® and System Sensor® are registered trademarks of and Farenhyt™ is a trademark of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical
Support, Please call
800-446-6444.

SPECIFICATIONS

Physical: 4.5" H x 4"W x 1.25" D

Shipping Weight: 6.3oz (196g)

ELECTRICAL RATINGS

Operating Voltage: 15 to 32VDC

Standby & Alarm Current: 350 μ A

End-of-Line Resistance: 47kΩ

SLC Loop Impedance: 40Ω

ENVIRONMENTAL

Operating Temperature: 32°-120°F (0°C – 49°C)

Humidity: 10 to 93% non-condensing)

ORDERING INFORMATION

IDP-Control: Notification module

ACCESSORIES

SMB500: 4" Square Surface Mount Electrical Box

CB500: Module Barrier. Used to separate power limited and non-power limited wiring in a junction box.

For more information

Learn more about Honeywell's Farenhyt Series
and other products available by visiting
www.farenhyt.com

Honeywell Security & Fire

12 Clintonville Road
Northford, CT 06472
800-328-0103

Doc 350293 | Rev H | 09/17
© 2017 Honeywell International Inc.

Honeywell
THE POWER OF **CONNECTED**