



Features

- The module can synchronize one (1) class A or two (2) class B NAC lines without the need for programming
- The module is fail-safe and will provide power to the NAC line by default through a relay
- The module has an isolated sync input/output to link up to 20 modules together
- Mounts in a standard 4" square or double gang electrical back box
- Supports two-stage alarm function of Alert (20 strokes per minute) and Evac (temp 3)

Description

The MIX-4050 Sync Module is designed to be used with MGC NAC devices.

The Sync Module is used to synchronize the strobe flashes with the audio signal pattern. The same protocol is used to silence the horn while maintaining the strobe flashes. It also supports two stage alarm function of Alert (20 strokes per minute) and Evac (temp 3).

The sync module is installed between a fire alarm system NAC line and the NAC devices. When there is no alarm, the NAC line connected to the sync module is off and no power is applied to the device. When the NAC line turns on, the device is powered and becomes operational.

Up to 20 modules can be interconnected to achieve synchronization without the need to program or select a master unit. An LED will indicate activation and master/slave status. Master will flash intermittently while slave will flash at a fast rate. Correct interconnection of devices can be checked by ensuring only one device flashes at the master rate.

The silence input can be used to silence the NAC devices on one MIX-4050 without affecting the other MIX-4050 devices that are interconnected.

The module can synchronize one (1) class A or two (2) class B NAC lines without the need for programming.

This is a hardware only device and does not require programming or setting of switches or jumpers.

Benefits

- The Sync module uses no power during standby
- Does not require addressing
- An LED will indicate activation and master/ slave status
- The Sync module is compatible with any UL/ULC listed panels and power supplies capable of providing regulated 24VDC or FWR for NACs
- The interconnected MIX-4050 devices synchronize automatically without the need of programming or jumper setting

Compatible Devices


- MGC FH-400 Series
 - Horns
 - Strobes
- MGC FHS-400 Series Horn Strobes
- MGC SPPS Series
 - Speakers
 - Speaker Strobes



Technical Specifications

Operating Voltage	24V regulated (16 to 33V DC filtered or FWR)
Alarm supply current	Maximum 25mA average
NAC lines current	3A for class A , 2 x 3A for class B lines
First stage and Silence input activation voltage	16 to 33V DC filtered or FWR
First stage and Silence input current	3.5mA max @ 33VDC
Sync link	Internally limited current and voltage
Temperature Range	32°F to 120°F (0°C to 49°C)
Humidity:	10% to 93% Non-condensing
Dimensions	4.625" H x 4.25" W x 1.125" D
Mounting	4" square by 2 1/8" deep box or BB-400 Electrical Box
Wiring range on all terminals	22 to 12 AWG

Interconnection

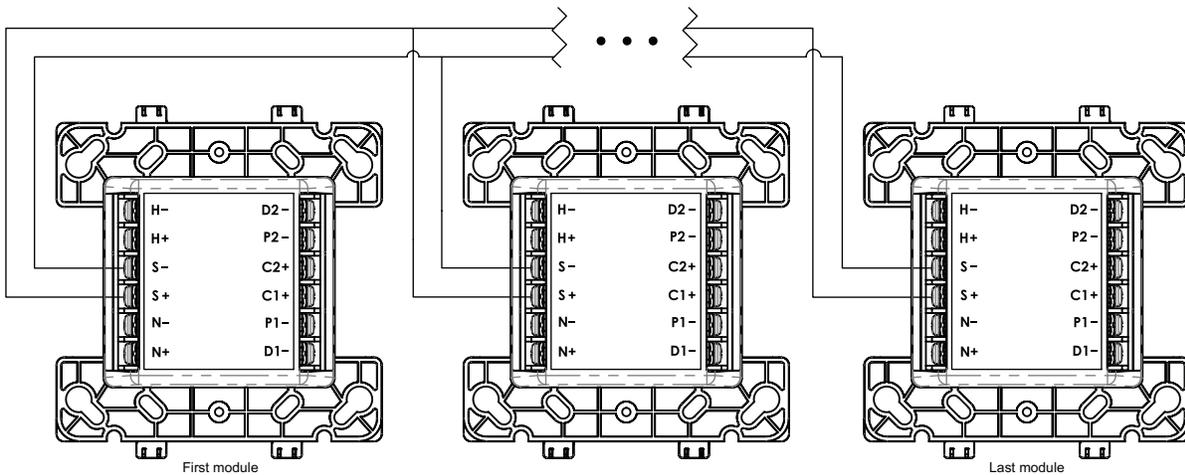

SYNC MODULES INTERCONNECTION (20 MODULES MAXIMUM):

For more details refer to Installation Manual LT-6151

Ordering Information

Model	Description
MIX-4050	Sync Module White Finish
BB-400	Surface mount back box



Canada
 25 Interchange Way
 Vaughan, Ontario L4K 5W3
 Telephone: (905) 660-4655
 Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates
 Niagara Falls, NY 14305
 Toll Free: (888) 660-4655
 Fax Toll Free: (888) 660-4113



THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness.