



Remote Microphones

3-REMICA, 3-REMICP



3-REMICP



3-REMICA



7165-1657:0186



Overview

The remote microphone panel is a supervised remote microphone, used with the Audio Source Unit's (3-ASU) remote microphone input. The remote microphone panel is available in two packages. The 3-REMICA is designed to mount in two spaces of a 3-ANN series annunciator enclosure. Model 3-REMICP mounts in a CAB series enclosure on a 3-CHASS4 rail assembly. Both panels include a dynamic push-to-talk microphone and operator interface panel.

Each microphone panel has two external audio inputs. Using the external inputs, up to 63 microphone panels can be connected to a single 3-ASU. The first panel to initiate a page seizes control of the remote 3-ASU input and automatically prevents the other remote panels from issuing a page while the first unit is in use. The built-in 3-ASU microphone has a higher priority than any remote microphone, and will override a remote page.

The front panel provides Local Page Active, Remote Page Active, and Trouble LED indicators as well as an integral VU (Volume Unit) meter to indicate page volume level.

All panels utilize a 24 Vdc power source. Provisions are made for redundant power supplies. All wiring is supervised. A form C trouble contact is provided for use with a Signature input module to report trouble back to the system.

Standard Features

- Up to 63 remote microphones per ASU
- Annunciator or cabinet mounting
- VU meter and status LEDs
- Active remote mic has priority with ASU priority override
- All wiring is supervised

Application

The 3-REMICA and 3-REMICP are designed to add remote paging capability at network nodes or remote annunciators that are remotely located from the Audio Source Unit. These areas are typically alternate fire command stations, security desks, or other areas where public messages are issued during an emergency. Selection of paging areas is done with standard EST3 Control Display Modules, which can be programmed as required for each paging application.



Contact us...


Email: edwards.fire@fs.utc.com
 Web: www.est-fire.com

EST is an **EDWARDS** brand.
 1016 Corporate Park Drive
 Mebane, NC 27302

In Canada, contact Chubb Edwards...
 Email: inquiries@chubbedwards.com
 Web: www.chubbedwards.com

© 2014 UTC Fire & Security Americas Corporation, Inc. All rights reserved. Specifications subject to change without notice. Edwards is part of UTC Climate, Controls & Security, a unit of United Technologies Corporation.

Typical Wiring

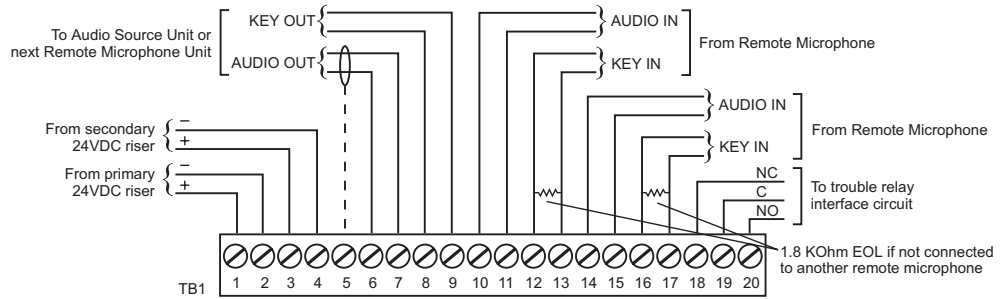

Engineering Specifications

Remote paging microphones shall be provided at the locations specified on the drawings. Each remote microphone shall provide a dynamic Push-to-Talk microphone, Page level meter, Local Page Active LED, Remote Page Active LED, and Trouble LED. Selection of paging areas shall be provided using Control Display Modules, which can be programmed as required for each paging application. The system shall support up to 63 remote microphones.

Technical Specifications

Installation	
3-REMICA	- Takes up two spaces in the 3-ANN series of annunciator cabinets.
3-REMICP	- Remote microphone in chassis for use in CAB series cabinets.
3-REMICA-E	- Takes up to two spaces in a 3-ANN series annunciator cabinet, EN54 listed, CE compliant (see Agency Listings below).
Input Power	21 to 27 VDC Current: 64 mA
Microphone	Dynamic, PTT
Audio Output	1 VRMS into 1K Ohms
Audio Input	1 VRMS into 1K Ohms
Frequency Response	100 - 4,000 Hz
Supervision Audio Key (PTT)	1 KHz Tone Pulse DC for opens and shorts
Wiring	
Maximum Resistance	210 ohms max. from output of last cascaded remote microphone to 3-ASU remote microphone input
Wire Type	Audio = Twisted-shielded pair, 14 - 26 AWG Key (PTT) = Twisted pair, 14 - 26 AWG
Indicators	
	Page level meter, Local Page Active LED, Remote Page Active LED, Trouble LED
Agency Listings	
	UL, ULC, EN 54-2: 1997 + A1: 2006, EN 54-4: 1997 + A1: 2002 + A2: 2006, and EN 54-16: 2008
Operating Environment	
	32°F (0°C) to 120°F (49°C), 93% RH Non-condensing

Ordering Information

Catalog Number	Description	Ship Wt. lb (kg)
3-REMICA	Remote microphone for use in 3-ANN series annunciator cabinets	15 (6.8)
3-REMICA-E	Remote microphone for use in 3-ANN series annunciator cabinets for EN54-16 Applications	15 (6.8)
3-REMICP	Remote microphone in chassis for use in CAB series cabinets	15 (6.8)
3-CHASS4	Chassis, with space for a 3-REMICP or 3-ASU and four local rail modules, for use in CAB series cabinets	8.5 (3.9)